


# Innovative Industrial Solutions



I.I.S.

## Telex TIF-2000A 1-Line Digital Telephone Interface

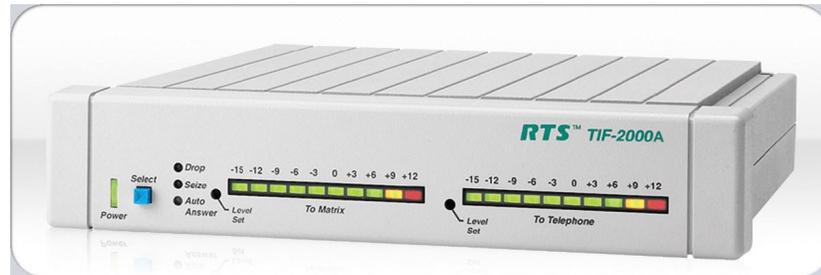

The TIF-2000A is a single line digital hybrid telephone line interface designed to be compatible with ADAM, ADAM-CS, Cronus, Zeus, and CS 9000 series intercom systems. It provides bidirectional communication between the intercom matrix and a standard DTMF capable telephone line. It allows the phone to access all crosspoints of the matrix, as well as dynamic party lines, IFB circuits, and other forms of communications. The 1U high by ½ wide rackmountable (via an optional MCP-1 or MCP-2 kit) TIF-2000A provides a transparent link to the telephone system enabling full dial-out capability from any designated keypanel with keypad. The TIF-2000A has full dial-in capability giving the caller a keypanel on the system via commands from the DTMF pad on their telephone. Since the TIF-2000A appears to the matrix as any other keypanel would, the only limitation on the number of units in the system is the same as for other keypanels.

- Auto or Manual Answer
- Select security code or none.
- Select number of rings before answer.
- Caller can be locked to one matrix point.
- Up to 16 panels may be selected to ring.
- Call in directly to party-line or IFB
- Caller may select up to seven T/L assignments
- Caller may change presets
- Auto disconnect
- Direct audio input mixes with matrix audio
- Levels can be adjusted for intercom & telephone
- Downloadable telephone system configuration

Innovative Industrial Solutions, Inc.

2830 Skyline Drive Russellville, AR 72802

Phone (479) 968-4266

Fax (479) 890-9072

www.i-i-s.net

# Innovative Industrial Solutions



I.I.S.

## Telex TIF-2000A 1-Line Digital Telephone Interface

### Matrix Input/Output

0 dBu to +20 dBu

### Telephone Input/Output

-30 dBu to +6 dBu

### Noise (200 Hz to 3.8 kHz)

-40 dBu or less

### Harmonic Distortion (300 Hz to 3.8 kHz)

Intercom Side: -30 dBu or less

Telephone Side: -25 dBu or less

### Frequency Response

300 Hz to 3.8 kHz +0 dB, -6 dB

### Matrix Connectors

DB-9 Female

RJ-12 Female

### Telephone Line Connector

RJ-11 Female

### Telephone Loop-Thru Connector

RJ-11 Female

### Power Requirements

100-240VAC, 50/60 Hz, 1A

### Environmental

Operating Temperature:

0°C to 50°C

Storage Temperature:

-20°C to 75°C

Humidity (Operating & Storage):

0 to 95%, non-condensing

### Dimensions

1.72" (44mm) high, 8.19" (208 mm) wide, 8" (203 mm) deep

### Weight

4.4 lbs. (2.0 kg)

### Finish

Thermoplastic front panel, aluminum case and rear panel, light gray finish

Innovative Industrial Solutions, Inc.

2830 Skyline Drive Russellville, AR 72802

Phone (479) 968-4266

Fax (479) 890-9072

[www.i-i-s.net](http://www.i-i-s.net)